Архангельск (8182)63-90-72 Астана (7172)727-132 Астрахань (8512)99-46-04 Барнаул (3852)73-04-60 Белгород (4722)40-23-64 Брянск (4832)59-03-52 Владивосток (423)249-28-31 Волгоград (844)278-03-48 Вологда (8172)26-41-59 Воронеж (473)204-51-73 Екатеринбург (343)384-55-89 Иваново (4932)77-34-06 Ижевск (3412)26-03-58 Иркутск (395)279-98-46 Казань (843)206-01-48 Калининград (4012)72-03-81 Калуга (4842)92-23-67 Киров (3842)65-04-62 Киров (332)68-02-04 Красноярар (861)203-40-90 Красноярск (391)204-63-61 Курск (4712)77-13-04 Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13 Москва (495)268-04-70 Мурманск (8152)59-64-93 Набережные Челны (8552)20-53-41 Нижний Новгород (831)429-08-12 Новосибирск (383)227-86-73 Омск (3812)21-46-40 Орел (4862)44-53-42 Оренбург (3532)37-68-04 Пенза (8412)22-31-16

Россия (495)268-04-70

Пермь (342)205-81-47 Ростов-на-Дону (863)308-18-15 Рязань (4912)46-61-64 Самара (846)206-03-16 Санкт-Петербург (812)309-46-40 Саратов (846)208-03-16 Севастополь (8692)22-31-93 Симферополь (3652)67-13-56 Смоленск (4812)29-41-54 Сочи (862)225-72-31 Ставрополь (8652)20-65-13 Сургут (3462)77-98-35 Тверь (4822)63-31-35 Томск (3822)98-41-53 Тула (4872)74-02-29 Тюмень (3452)66-21-18 Ульяновск (8422)24-23-59 Уфа (347)229-48-12 Хабаровск (4212)92-98-04 Челябинск (351)202-03-61 Череповец (8202)49-02-64 Яроспавль (4852)69-52-93

Казахстан (772)734-952-31

КАТАЛОГ

https://abeba.nt-rt.ru || abe@nt-rt.ru



ROAD

5

TOR

050

-





s=> 🕞 🍪 🕢 😭 🔁 🏶 🅮 😅 🗲 🕕 🕙 🗶 🗲 🖬

Brand	PROTEKTOR
Industry	electronics industry, light industry, transport / warehouses
Product type	sandals
Color	green
Norm	EN ISO 20345:2011
Certificate	IPS-1439-21/2021 wyd.1
Product features	increased breathability, increased water resistance, composite toe cap, additional toe reinforcement in the upper, the footwear is suitable for working on the knees
Product characteristics	increased breathability
	lining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 42.9 mg / (cm2 * h), the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2,
	collar and tongue material - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 58.2 mg / (cm2 * h), the water vapor coefficient is minimum 15 mg / cm2 and our result is 466 mg / cm2
	increased water resistance
	velour - water absorption after 60 min - in requirements no more than 30% - our result 3.15%, water permeability expressed as material weight gain after 60 min - in requirements no more than 0.2 g - our result 0.02 g
Upper material	velour leather
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/pu, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,65 kg



ROAD 5005848

ss 🖨 🚱 🏈 🖨 🖶 🌐 🏶 🕾 🗲 🕒 🕕 🧟 📨

Brand	PROTEKTOR
Industry	electronics industry, light industry, transport / warehouses
Product type	shoes
Color	green
Norm	EN ISO 20345:2011
Certificate	IPS-1439-21/2021 wyd.1
Product features	increased breathability, increased water resistance, composite toe cap, additional toe reinforcement in the upper, the footwear is suitable for working on the knees, bellows tongue
Product characteristics	increased breathability
	lining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 42.9 mg / (cm2 * h), the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2.
	collar and tongue material - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 58.2 mg / (cm2 * h), the water vapor coefficient is minimum 15 mg / cm2 and our result is 466 mg / cm2
	increased water resistance
	velour - water absorption after 60 min - in requirements no more than 30% - our result 3.15%, water permeability expressed as material weight gain after 60 min - in requirements no more than 0.2 g - our result 0.02 g
Upper material	velour leather
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/pu, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,68 kg



ROAD

s 🗧 🐨 🎑 🖉 😭 🕄 🖉 🏶 🥮 🥸 🖙 🗲 🕒 🌒 🗶 🗾 AT PI

Brand	PROTEKTOR
Industry	electronics industry, light industry, transport / warehouses
Product type	ankle boots
Color	green
Norm	EN ISO 20345:2011
Certificate	IPS-1439-21/2021 wyd.1
Product features	increased breathability, increased water resistance, composite toe cap, additional toe reinforcement in the upper, the footwear is suitable for working on the knees, bellows tongue, PRO-TENDON technology (Achilles tendon protection)
Product characteristics	increased breathability
	lining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 42.9 mg / (cm2 * h), the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2.
	collar and tongue material - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 58.2 mg / (cm2 * h), the water vapor coefficient is minimum 15 mg / cm2 and our result is 466 mg / cm2
	increased water resistance
	velour - water absorption after 60 min - in requirements no more than 30% - our result 3.15%, water permeability expressed as material weight gain after 60 min - in requirements no more than 0.2 g - our result 0.02 g
Upper material	velour leather
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/pu, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,75 kg



ROAD 5015847

sip 🖨 🚱 🕢 😭 🔁 🏶 🍰 🥶 🗲 🕕 🧟 🗶 🛃 🕅

Brand	PROTEKTOR
Industry	electronics industry, light industry, transport / warehouses
Product type	sandals
Color	● black
Norm	EN ISO 20345:2011
Certificate	IPS-1439-21/2021 wyd.1
Product features	increased breathability, increased water resistance, composite toe cap, additional toe reinforcement in the upper, the footwear is suitable for working on the knees
Product characteristics	increased breathability
	lining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 42.9 mg / (cm2 * h), the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2,
	collar and tongue material - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 58.2 mg / (cm2 * h), the water vapor coefficient is minimum 15 mg / cm2 and our result is 466 mg / cm2
	increased water resistance
	velour - water absorption after 60 min - in requirements no more than 30% - our result 3.15%, water permeability expressed as material weight gain after 60 min - in requirements no more than 0.2 g - our result 0.02 g
Upper material	velour leather
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/pu, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,65 kg



ROAD 5015848

so 🖨 🚱 🏈 🖨 🖶 🌐 🏶 🕾 🗲 🕒 🗍 🕙 🗶 🖪 🕅


Brand	PROTEKTOR
Industry	electronics industry, light industry, transport / warehouses
Product type	shoes
Color	e black
Norm	EN ISO 20345:2011
Certificate	IPS-1439-21/2021 wyd.1
Product features	increased breathability, increased water resistance, composite toe cap, additional toe reinforcement in the upper, the footwear is suitable for working on the knees, bellows tongue
Product characteristics	increased breathability
	lining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 42.9 mg / (cm2 * h), the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2,
	collar and tongue material - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 58.2 mg / (cm2 * h), the water vapor coefficient is minimum 15 mg / cm2 and our result is 466 mg / cm2
	increased water resistance
	velour - water absorption after 60 min - in requirements no more than 30% - our result 3.15%, water permeability expressed as material weight gain after 60 min - in requirements no more than 0.2 g - our result 0.02 g
Upper material	velour leather
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/pu, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,68 kg



🐵 🖨 🚱 🕢 😭 😴 🕕 😂 🏶 🥸 🚭 🕒 🗐 🧶 🗶 🖪 🗛 🖪

Brand	PROTEKTOR
Industry	electronics industry, light industry, transport / warehouses
Product type	ankle boots
Color	black
Norm	EN ISO 20345:2011
Certificate	IPS-1439-21/2021 wyd.1
Product features	increased breathability, increased water resistance, composite toe cap, additional toe reinforcement in the upper, the footwear is suitable for working on the knees, bellows tongue, PRO-TENDON technology (Achilles tendon protection)
Product characteristics	increased breathability
	lining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 42.9 mg / (cm2 * h), the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2.
	collar and tongue material - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 58.2 mg / (cm2 * h), the water vapor coefficient is minimum 15 mg / cm2 and our result is 466 mg / cm2
	increased water resistance
	velour - water absorption after 60 min - in requirements no more than 30% - our result 3.15%, water permeability expressed as material weight gain after 60 min - in requirements no more than 0.2 g - our result 0.02 g
Upper material	velour leather
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/pu, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,75 kg



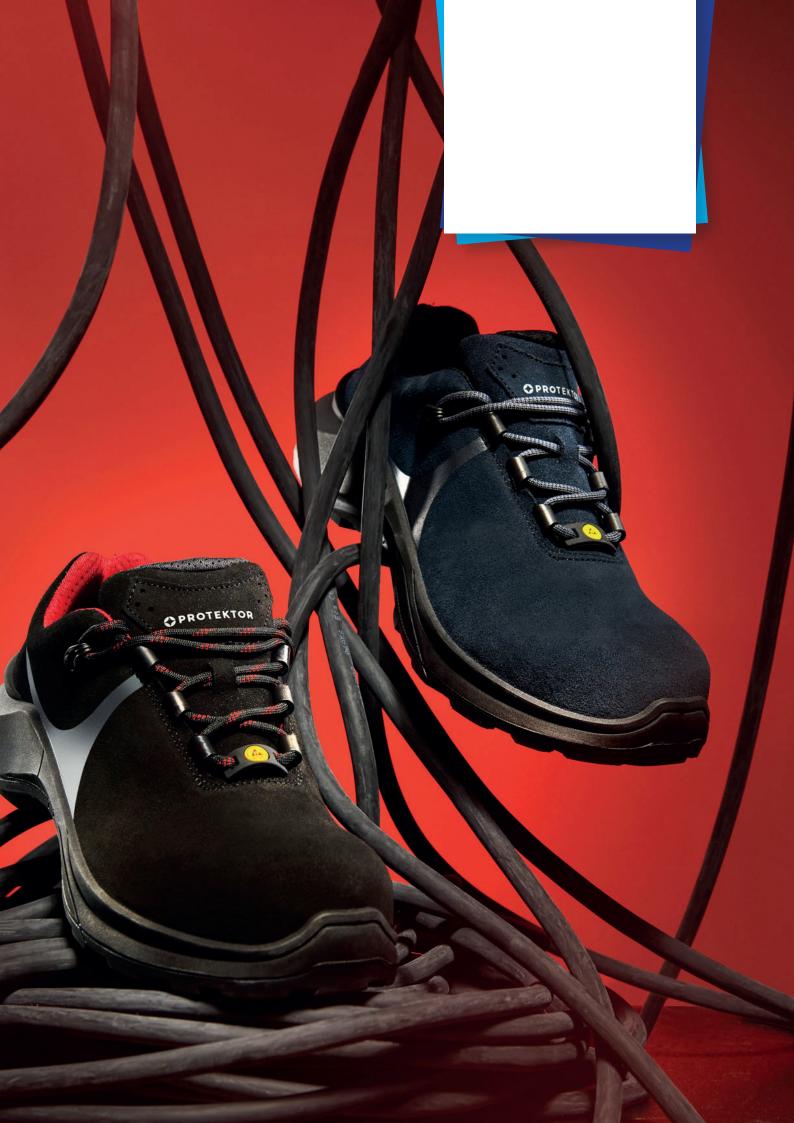





sid 🔁 🐼 🏈 😭 😴 🏶 🅸 🚭 🐨 🗊 🕕 🧟 🗶 🗲 🕅

Brand	PROTEKTOR
Industry	electronics industry, light industry, transport / warehouses
Product type	sandals
Color	e black
Norm	EN ISO 20345:2011
Certificate	IPS-1439-20/2021 wyd.1
Product features	increased breathability, increased water resistance, composite toe cap, metal free, easy-clean upper
Product characteristics	increased breathability
	lining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 42.9 mg / (cm2 * h), the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2.
	increased water resistance
	velour - water absorption after 60 min - in requirements no more than 30% - our result 3.15%, water permeability expressed as material weight gain after 60 min - in requirements no more than 0.2 g - our result 0.02 g
Upper material	velour leather
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/pu, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,65 kg





ss 🗧 🚱 🏈 😭 😭 🌐 🏶 🕮 🕬 🐨 🐻 🕕 🧟 🗶 🛃 🜆

Brand	PROTEKTOR
Industry	electronics industry, light industry, transport / warehouses
Product type	shoes
Color	e black
Norm	EN ISO 20345:2011
Certificate	IPS-1439-20/2021 wyd.1
Product features	increased breathability, increased water resistance, composite toe cap, metal free, easy-clean upper
Product characteristics	increased breathability
	lining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 42.9 mg / (cm2 * h), the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2.
	increased water resistance
	velour - water absorption after 60 min - in requirements no more than 30% - our result 3.15%, water permeability expressed as material weight gain after 60 min - in requirements no more than 0.2 g - our result 0.02 g
Upper material	velour leather
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/pu, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,65 kg





💿 ╤ 💿 🎑 🖉 😭 🕄 🕑 🔮 🏶 🕸 🚭 🗊 🗐 🧶 🗶 🗾 🕅 PI

Brand	PROTEKTOR
Industry	electronics industry, light industry, transport / warehouses
Product type	ankle boots
Color	● black
Norm	EN ISO 20345:2011
Certificate	IPS-1439-20/2021 wyd.1
Product features	increased breathability, increased water resistance, composite toe cap, metal free, easy-clean upper, PRO-TENDON technology (Achilles tendon protection)
Product characteristics	increased breathability
	lining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 42.9 mg / (cm2 * h), the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2.
	collar and tongue material - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 58.2 mg / (cm2 * h), the water vapor coefficient is minimum 15 mg / cm2 and our result is 466 mg / cm2
	increased water resistance
	velour - water absorption after 60 min - in requirements no more than 30% - our result 3.15%, water permeability expressed as material weight gain after 60 min - in requirements no more than 0.2 g - our result 0.02 g
Upper material	velour leather
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/pu, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,70 kg



sid 🔁 🐼 🏈 😭 😴 🏶 🅸 🚭 🐨 🗊 🕕 🧟 🗶 🗲 🕅

Brand	PROTEKTOR
Industry	electronics industry, light industry, transport / warehouses
Product type	sandals
Color	• gray
Norm	EN ISO 20345:2011
Certificate	IPS-1439-20/2021 wyd.1
Product features	increased breathability, increased water resistance, composite toe cap, metal free, easy-clean upper
Product characteristics	increased breathability
	lining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 42.9 mg / (cm2 * h), the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2.
	increased water resistance
	velour - water absorption after 60 min - in requirements no more than 30% - our result 3.15%, water permeability expressed as material weight gain after 60 min - in requirements no more than 0.2 g - our result 0.02 g
Upper material	velour leather
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/pu, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,65 kg



TRAX

ss 🗧 🚱 🏈 😭 😭 🌐 🏶 🕮 🕬 🐨 🐻 🕕 🧟 🗶 🛃 🜆

Brand	PROTEKTOR
Industry	electronics industry, light industry, transport / warehouses
Product type	shoes
Color	• gray
Norm	EN ISO 20345:2011
Certificate	IPS-1439-20/2021 wyd.1
Product features	increased breathability, increased water resistance, composite toe cap, metal free, easy-clean upper
Product characteristics	increased breathability
	lining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 42.9 mg / (cm2 * h), the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2.
	increased water resistance
	velour - water absorption after 60 min - in requirements no more than 30% - our result 3.15%, water permeability expressed as material weight gain after 60 min - in requirements no more than 0.2 g - our result 0.02 g
Upper material	velour leather
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/pu, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,65 kg





💷 🛱 🚱 🕢 😭 😴 🕒 🔮 🏶 🥸 🐨 🐨 🗊 🕙 🗶 🗾 🗛 🎦

Brand	PROTEKTOR
Industry	electronics industry, light industry, transport / warehouses
Product type	ankle boots
Color	• gray
Norm	EN ISO 20345:2011
Certificate	IPS-1439-20/2021 wyd.1
Product features	increased breathability, increased water resistance, composite toe cap, metal free, easy-clean upper, PRO-TENDON technology (Achilles tendon protection)
Product characteristics	increased breathability
	hining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 42.9 mg / (cm2 * h), the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2.
	collar and tongue material - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 58.2 mg / (cm2 * h), the water vapor coefficient is minimum 15 mg / cm2 and our result is 466 mg / cm2
	increased water resistance
	velour - water absorption after 60 min - in requirements no more than 30% - our result 3.15%, water permeability expressed as material weight gain after 60 min - in requirements no more than 0.2 g - our result 0.02 g
Upper material	velour leather
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/pu, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,70 kg



TRAX

sid 🔁 🐼 🏈 😭 😴 🏶 🅸 🚭 🐨 🗊 🕕 🧟 🗶 🗲 🕅

Brand	PROTEKTOR
Industry	electronics industry, light industry, transport / warehouses
Product type	sandals
Color	navy blue
Norm	EN ISO 20345:2011
Certificate	IPS-1439-20/2021 wyd.1
Product features	increased breathability, increased water resistance, composite toe cap, metal free, easy-clean upper
Product characteristics	increased breathability
	lining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 42.9 mg / (cm2 * h), the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2.
	increased water resistance
	velour - water absorption after 60 min - in requirements no more than 30% - our result 3.15%, water permeability expressed as material weight gain after 60 min - in requirements no more than 0.2 g - our result 0.02 g
Upper material	velour leather
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/pu, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,65 kg



TRAX

ss 🗧 🚱 🏈 😭 😭 🌐 🌐 🥮 📾 🐨 🐻 🕕 🧟 🔀 🖪 🕅

Brand	PROTEKTOR
Industry	electronics industry, light industry, transport / warehouses
Product type	shoes
Color	navy blue
Norm	EN ISO 20345:2011
Certificate	IPS-1439-20/2021 wyd.1
Product features	increased breathability, increased water resistance, composite toe cap, metal free, easy-clean upper
Product characteristics	increased breathability
	lining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 42.9 mg / (cm2 * h), the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2.
	increased water resistance
	velour - water absorption after 60 min - in requirements no more than 30% - our result 3.15%, water permeability expressed as material weight gain after 60 min - in requirements no more than 0.2 g - our result 0.02 g
Upper material	velour leather
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/pu, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,65 kg





💷 🛱 🚱 🕢 😭 😴 🕒 🔮 🏶 🥸 🐨 🐨 🗊 🕙 🗶 🗾 🗛 🎦

Brand	PROTEKTOR
Industry	electronics industry, light industry, transport / warehouses
Product type	ankle boots
Color	navy blue
Norm	EN ISO 20345:2011
Certificate	IPS-1439-20/2021 wyd.1
Product features	increased breathability, increased water resistance, composite toe cap, metal free, easy-clean upper, PRO-TENDON technology (Achilles tendon protection)
Product characteristics	increased breathability
	lining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 $*$ h) - our result is 42.9 mg / (cm2 $*$ h), the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2.
	collar and tongue material - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 58.2 mg / (cm2 * h), the water vapor coefficient is minimum 15 mg / cm2 and our result is 466 mg / cm2
	increased water resistance
	velour - water absorption after 60 min - in requirements no more than 30% - our result 3.15%, water permeability expressed as material weight gain after 60 min - in requirements no more than 0.2 g - our result 0.02 g
Upper material	velour leather
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/pu, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,70 kg

TRAX AUTOMOTIVE

DOTENTO



TRAX AUTOMOTIVE 5005840

5005640

Comfort and safety can always go hand in hand with the new TRAX AUTOMOTIVE footwear line. The upper is designed in a minimalist way with a reduced number of stitching for easier cleaning of the shoes from the outside. Abrasion-resistant full-grain leather and the two-ply material used in the TRAX model, which is more than three times the standard in terms of tear resistance. TRAX AUTOMOTIVE is also light and flexible, for greater comfort in overcoming everyday challenges.

50 🗧 🕼 🔗 😭 💮 💮 💮 🐨 🐨 🗊 🕕 🕙 😵 🔀 🖪 At

Brand	PROTEKTOR
Industry	electronics industry, light industry, transport / warehouses
Product type	sandals
Color	e black
Norm	EN ISO 20345:2011
Certificate	IPS-1439-20/2021 wyd.1
Product features	increased breathability, increased durability of the upper, composite toe cap, metal free, easy-clean upper, disinfection
Product characteristics	increased breathability
	lining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 42.9 mg / (cm2 * h), the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2
	increased durability of the upper
	grain leather - excellent parameters of tensile strength along and across, additionally tested for the friction resistance of the coating proving that the resistance to external factors, which cause abrasion of the leather, exceeds the standards
Upper material	grain leather
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/pu, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,64 kg

TRAX AUTOMOTIVE



Comfort and safety can always go hand in hand with the new TRAX AUTOMOTIVE footwear line. The upper is designed in a minimalist way with a reduced number of stitching for easier cleaning of the shoes from the outside. Abrasion-resistant full-grain leather and the two-ply material used in the TRAX model, which is more than three times the standard in terms of tear resistance. TRAX AUTOMOTIVE is also light and flexible, for greater comfort in overcoming everyday challenges.

● 🗣 🕼 🖉 😭 😭 🏶 🤀 🛟 🚭 🕼 👔 🐨 🐨 🗊 🕘 😤 🗶 🛃 🚮

Brand	PROTEKTOR
Industry	electronics industry, light industry, transport / warehouses
Product type	shoes
Color	e black
Norm	EN ISO 20345:2011
Certificate	IPS-1439-20/2021 wyd.1
Product features	increased breathability, increased durability of the upper, composite toe cap, metal free, easy-clean upper, disinfection
Product characteristics	increased breathability
	lining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 42.9 mg / (cm2 * h), the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2
	increased durability of the upper
	grain leather - excellent parameters of tensile strength along and across, additionally tested for the friction resistance of the coating proving that the resistance to external factors, which cause abrasion of the leather, exceeds the standards
Upper material	grain leather
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/pu, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,75 kg



TRAX AUTOMOTIVE 5005842

Comfort and safety can always go hand in hand with the new TRAX AUTOMOTIVE footwear line. The upper is designed in a minimalist way with a reduced number of stitching for easier cleaning of the shoes from the outside. Abrasion-resistant full-grain leather and the two-ply material used in the TRAX model, which is more than three times the standard in terms of tear resistance. TRAX AUTOMOTIVE is also light and flexible, for greater comfort in overcoming everyday challenges.

🗧 💀 🎑 🖉 膏 🔂 🔮 🌐 🛟 🚭 🌚 🐨 🗊 🕘 🗐 😤 🗶 🖪 🗛 🎦 **S**3

Brand	PROTEKTOR
Industry	electronics industry, light industry, transport / warehouses
Product type	ankle boots
Color	e black
Norm	EN ISO 20345:2011
Certificate	IPS-1439-20/2021 wyd.1
Product features	increased breathability, increased durability of the upper, composite toe cap, metal free, easy-clean upper, disinfection, PRO-TENDON technology (Achilles tendon protection)
Product characteristics	increased breathability
	lining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 42.9 mg / (cm2 * h), the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2.
	collar and tongue material - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 58.2 mg / (cm2 * h), the water vapor coefficient is minimum 15 mg / cm2 and our result is 466 mg / cm2
	increased durability of the upper
	grain leather - excellent parameters of tensile strength along and across, additionally tested for the friction resistance of the coating proving that the resistance to external factors, which cause abrasion of the leather, exceeds the standards
Upper material	grain leather
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/pu, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,70 kg

CONSTRUCT



Observing the struggles and difficult work of workers in the wood industry, construction, finishing and renovation industries - we have created a completely new line of footwear. The most important for us was the comfort of movement and the versatility of the shoe. Thanks to the self-cleaning tread, the sole is easy to keep clean, and the high anti-slip properties are suitable for difficult working conditions and changing weather outside.

CONSTRUCT

5005850

s 🗧 🔁 🖉 🐨 🖓 😭 🔮 🏶 🔮 🐨 🕞 🕒 🥙 🗶 🗲 🕼

Brand	PROTEKTOR
Industry	construction, finishing works, light industry
Product type	shoes
Color	e beige
Norm	EN ISO 20345:2011
Certificate	IPS-1439-25/2021 wyd.1
Product features	increased breathability, increased water resistance, composite toe cap, additional toe reinforcement in the upper, the footwear is suitable for working on the knees, bellows tongue
Product characteristics	increased breathability
	lining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 42.9 mg / (cm2 * h) , the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2
	collar and tongue material - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 58.2 mg / (cm2 * h), the water vapor coefficient is minimum 15 mg / cm2 and our result is 466 mg / cm2.
	nubuck - water vapor permeability in the requirements not less than 0.8 mg / (cm2 * h) - our result 10.3 mg / (cm2 * h)
	increased water resistance
	nubuck - water permeability after 60 minutes under dynamic conditions in requirements not more than 0.2 g - our result 0.02 g, water absorption after 60 minutes under dynamic conditions in requirements not more than 30% - our result 5.3%
Upper material	nubuck
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/rubber, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole), SELF CLEAN technology (self-cleaning sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,64 kg



CONSTRUCT 5005851

Observing the struggles and difficult work of workers in the wood industry, construction, finishing and renovation industries - we have created a completely new line of footwear. The most important for us was the comfort of movement and the versatility of the shoe. Thanks to the self-cleaning tread, the sole is easy to keep clean, and the high anti-slip properties are suitable for difficult working conditions and changing weather outside.

● 🗧 🚱 🍞 🕞 🕒 🔮 🏶 🔮 🚭 🕒 🖳 🖉 🖉 🖬 🖉 🛐

Brand	PROTEKTOR
Industry	construction, finishing works, light industry
Product type	ankle boots
Color	e beige
Norm	EN ISO 20345:2011
Certificate	IPS-1439-25/2021 wyd.1
Product features	increased breathability, increased water resistance, composite toe cap, additional toe reinforcement in the upper, the footwear is suitable for working on the knees, bellows tongue, PRO-TENDON technology (Achilles tendon protection)
Product characteristics	increased breathability
	lining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 42.9 mg / (cm2 * h), the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2
	collar and tongue material - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 58.2 mg / (cm2 * h), the water vapor coefficient is minimum 15 mg / cm2 and our result is 466 mg / cm2
	nubuck - water vapor permeability in the requirements not less than 0.8 mg / (cm2 * h) - our result 10.3 mg / (cm2 * h)
	increased water resistance
	nubuck - water permeability after 60 minutes under dynamic conditions in requirements not more than 0.2 g - our result 0.02 g, water absorption after 60 minutes under dynamic conditions in requirements not more than 30% - our result 5.3%
Upper material	nubuck
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/rubber, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole), SELF CLEAN technology (self-cleaning sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,70 kg



Observing the struggles and difficult work of workers in the wood industry, construction, finishing and renovation industries - we have created a completely new line of footwear. The most important for us was the comfort of movement and the versatility of the shoe. Thanks to the self-cleaning tread, the sole is easy to keep clean, and the high anti-slip properties are suitable for difficult working conditions and changing weather outside.

CONSTRUCT

5025850

s 🗧 🔁 🖉 🐨 🖓 😭 🔮 🏶 🔮 🐨 🕞 🕒 🥙 🗶 🗲 🕼

Brand	PROTEKTOR
Industry	construction, finishing works, light industry
Product type	shoes
Color	• gray
Norm	EN ISO 20345:2011
Certificate	IPS-1439-25/2021 wyd.1
Product features	increased breathability, increased water resistance, composite toe cap, additional toe reinforcement in the upper, the footwear is suitable for working on the knees, bellows tongue
Product characteristics	increased breathability
	lining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 42.9 mg / (cm2 * h), the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2
	collar and tongue material - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 58.2 mg / (cm2 * h), the water vapor coefficient is minimum 15 mg / cm2 and our result is 466 mg / cm2
	nubuck - water vapor permeability in the requirements not less than 0.8 mg / (cm2 * h) - our result 10.3 mg / (cm2 * h)
	increased water resistance
	nubuck - water permeability after 60 minutes under dynamic conditions in requirements not more than 0.2 g - our result 0.02 g, water absorption after 60 minutes under dynamic conditions in requirements not more than 30% - our result 5.3%
Upper material	nubuck
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/rubber, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole), SELF CLEAN technology (self-cleaning sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,64 kg



CONSTRUCT 5025851

Observing the struggles and difficult work of workers in the wood industry, construction, finishing and renovation industries - we have created a completely new line of footwear. The most to keep clean, and the high anti-slip properties are suitable for difficult working conditions and changing weather outside.

💷 🖨 🚱 🕞 🕃 🛞 🌐 🥮 🚭 🧲 🕒 🗐 🖳 🔀 🖬 🙆 🎦

Brand	PROTEKTOR
Industry	construction, finishing works, light industry
Product type	ankle boots
Color	gray
Norm	EN ISO 20345:2011
Certificate	IPS-1439-25/2021 wyd.1
Product features	increased breathability, increased water resistance, composite toe cap, additional toe reinforcement in the upper, the footwear is suitable for working on the knees, bellows tongue, PRO-TENDON technology (Achilles tendon protection)
Product characteristics	increased breathability
	lining - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 42.9 mg / (cm2 * h), the water vapor coefficient is required at least 15 mg / cm2 and our result is 343.3 mg / cm2.
	collar and tongue material - increased water vapor permeability in the requirements of min 0.8 mg / (cm2 * h) - our result is 58.2 mg / (cm2 * h), the water vapor coefficient is minimum 15 mg / cm2 and our result is 466 mg / cm2
	nubuck - water vapor permeability in the requirements not less than 0.8 mg / (cm2 * h) - our result 10.3 mg / (cm2 * h)
	increased water resistance
	nubuck - water permeability after 60 minutes under dynamic conditions in requirements not more than 0.2 g - our result 0.02 g, water absorption after 60 minutes under dynamic conditions in requirements not more than 30% - our result 5.3%
Upper material	nubuck
Lining & Sock	technological fabric
Insole	fabric, antibacterial insole
Sole	pu/rubber, sole tread allowing climbing the ladder safely, PRT FLEX technology, SHOCK ABSORBER technology, ANA- TECH technology (extended heel surface in the sole), SELF CLEAN technology (self-cleaning sole)
Fastening	shoelaces
Size	38 - 48
Weight (half pair s.42)	0,70 kg



Архангельск (8182)63-90-72 Астана (7172)727-132 Астрахань (8512)99-46-04 Астрахань (8512)99-46-04 Барнаул (3852)73-04-60 Белгород (4722)40-23-64 Брянск (4832)59-03-52 Владивосток (423)249-28-31 Волгоград (844)278-03-48 Вологда (8172)26-41-59 Воронеж (473)204-51-73 Екатеринбург (343)384-55-89 Иваново (4932)77-34-06 Ижевск (3412)26-03-58 Иркутск (395)279-98-46 Казань (843)206-01-48 Казань (843)206-01-48 Калининград (4012)72-03-81 Калуга (4842)92-23-67 Кемерово (3842)65-04-62 Киров (8332)68-02-04 Калика (8332)68-02-04 Краснодар (861)203-40-90 Красноярск (391)204-63-61 Курск (4712)77-13-04 Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13 Москва (495)268-04-70 Мурманск (8152)59-64-93 Набережные Челны (8552)20-53-41 Нижний Новгород (831)429-08-12 Новокузнецк (3843)20-46-81 Новосибирск (383)227-86-73 Омск (3812)21-46-40 Орен (4862)44-53-42 Орен (452)47-58-04 Оренбург (3532)37-68-04 Пенза (8412)22-31-16

Пермь (342)205-81-47 Ростов-на-Дону (863)308-18-15 Рязань (4912)46-61-64 Самара (846)206-03-16 Санкт-Петербург (812)309-46-40 Саратов (845)249-38-78 Севастополь (862)22-31-93 Симферополь (3652)67-13-56 Смоленск (4812)29-41-54 Сочи (862)225-72-31 Сочи (862)225-72-31 Ставрополь (8652)20-65-13

Казахстан (772)734-952-31

Сургут (3462)77-98-35 Тверь (4822)63-31-35 Томск (3822)98-41-53 Томск (3822)98-41-33 Тула (4872)74-02-29 Тюмень (3452)66-21-18 Ульяновск (8422)24-23-59 Уфа (347)229-48-12 Хабаровск (4212)92-98-04 Челябинск (351)202-03-61 Череповец (8202)49-02-64 Ярославль (4852)69-52-93

Россия (495)268-04-70 https://abeba.nt-rt.ru || abe@nt-rt.ru